


The Tropical Regulation Problem

V. M. Gonçalves

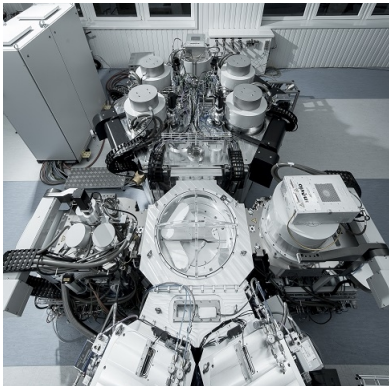

Université d'Angers

Motivations

- ▶ Some discrete event systems can be modeled as *timed event graphs*, and it is desirable to use the resources that can be manipulated at the system (starting time of machines, for instance) to achieve specifications;

Motivations

- ▶ Some discrete event systems can be modeled as *timed event graphs*, and it is desirable to use the resources that can be manipulated at the system (starting time of machines, for instance) to achieve specifications;
- ▶ For instance, in the manufacture of semiconductors - pictured in the first slide - it can be desirable that a wafer must be unloaded from the first module in at most 10 time units after the process in this module is finished . Otherwise, residual heat inside may damage the wafer. However, it cannot be unloaded till the next module is free... See [6];

Motivations

- ▶ Some discrete event systems can be modeled as *timed event graphs*, and it is desirable to use the resources that can be manipulated at the system (starting time of machines, for instance) to achieve specifications;
- ▶ For instance, in the manufacture of semiconductors - pictured in the first slide - it can be desirable that a wafer must be unloaded from the first module in at most 10 time units after the process in this module is finished . Otherwise, residual heat inside may damage the wafer. However, it cannot be unloaded till the next module is free... See [6];
- ▶ Synchronization problem.

Some basic notations

- ▶ *Tropical algebra*, or *Max-Plus algebra*, is the algebra in which the sum \oplus is the maximum and the product \otimes (omitted) is the traditional sum;

Some basic notations

- ▶ *Tropical algebra*, or *Max-Plus algebra*, is the algebra in which the sum \oplus is the maximum and the product \otimes (omitted) is the traditional sum;
- ▶ The neutral element of the sum, $-\infty$, denoted in this context as *null*, has the symbol \perp . A vector or matrix of appropriate dimension full of null entries will also be denoted by \perp ;

Some basic notations

- ▶ *Tropical algebra*, or *Max-Plus algebra*, is the algebra in which the sum \oplus is the maximum and the product \otimes (omitted) is the traditional sum;
- ▶ The neutral element of the sum, $-\infty$, denoted in this context as *null*, has the symbol \perp . A vector or matrix of appropriate dimension full of null entries will also be denoted by \perp ;
- ▶ I is the *tropical identity matrix* of appropriate dimension;

Some basic notations

- ▶ *Tropical algebra*, or *Max-Plus algebra*, is the algebra in which the sum \oplus is the maximum and the product \otimes (omitted) is the traditional sum;
- ▶ The neutral element of the sum, $-\infty$, denoted in this context as *null*, has the symbol \perp . A vector or matrix of appropriate dimension full of null entries will also be denoted by \perp ;
- ▶ I is the *tropical identity matrix* of appropriate dimension;
- ▶ $M^* = \bigoplus_{i=0}^{\infty} M^i$ is the *Kleene Closure* of M ;

Some basic notations

- ▶ *Tropical algebra*, or *Max-Plus algebra*, is the algebra in which the sum \oplus is the maximum and the product \otimes (omitted) is the traditional sum;
- ▶ The neutral element of the sum, $-\infty$, denoted in this context as *null*, has the symbol \perp . A vector or matrix of appropriate dimension full of null entries will also be denoted by \perp ;
- ▶ I is the *tropical identity matrix* of appropriate dimension;
- ▶ $M^* = \bigoplus_{i=0}^{\infty} M^i$ is the *Kleene Closure* of M ;
- ▶ $\rho(M)$ is the *spectral radius* of M , that is, the largest eigenvalue;

Some basic notations

- ▶ *Tropical algebra*, or *Max-Plus algebra*, is the algebra in which the sum \oplus is the maximum and the product \otimes (omitted) is the traditional sum;
- ▶ The neutral element of the sum, $-\infty$, denoted in this context as *null*, has the symbol \perp . A vector or matrix of appropriate dimension full of null entries will also be denoted by \perp ;
- ▶ I is the *tropical identity matrix* of appropriate dimension;
- ▶ $M^* = \bigoplus_{i=0}^{\infty} M^i$ is the *Kleene Closure* of M ;
- ▶ $\rho(M)$ is the *spectral radius* of M , that is, the largest eigenvalue;
- ▶ $Im\{M\}$ is the *right image* of M , that is, the set $\{x | \exists y, x = My\}$;

Problem statement

- ▶ Consider a *Tropical Linear Event-Invariant System*

$$x[k + 1] = Ax[k] \oplus Bu[k] \quad (1)$$

in which $x[k] \in \mathcal{X}$ is the *state vectors* and $u[k] \in \mathcal{U}$ is the *control vectors*;

Problem statement

- ▶ Consider a *Tropical Linear Event-Invariant System*

$$x[k + 1] = Ax[k] \oplus Bu[k] \quad (1)$$

in which $x[k] \in \mathcal{X}$ is the *state vectors* and $u[k] \in \mathcal{U}$ is the *control vectors*;

- ▶ Consider also a semimodule $\mathcal{S} \subseteq \mathcal{X}$ described implicitly as the set of $x \in \mathcal{X}$ such that

$$Ex = Dx; \quad (2)$$

Problem statement

- ▶ Consider a *Tropical Linear Event-Invariant System*

$$x[k + 1] = Ax[k] \oplus Bu[k] \quad (1)$$

in which $x[k] \in \mathcal{X}$ is the *state vectors* and $u[k] \in \mathcal{U}$ is the *control vectors*;

- ▶ Consider also a semimodule $\mathcal{S} \subseteq \mathcal{X}$ described implicitly as the set of $x \in \mathcal{X}$ such that

$$Ex = Dx; \quad (2)$$

- ▶ \mathcal{S} is the set of *desirable specifications*;

Problem statement

- ▶ Consider a *Tropical Linear Event-Invariant System*

$$x[k + 1] = Ax[k] \oplus Bu[k] \quad (1)$$

in which $x[k] \in \mathcal{X}$ is the *state vectors* and $u[k] \in \mathcal{U}$ is the *control vectors*;

- ▶ Consider also a semimodule $\mathcal{S} \subseteq \mathcal{X}$ described implicitly as the set of $x \in \mathcal{X}$ such that

$$Ex = Dx; \quad (2)$$

- ▶ \mathcal{S} is the set of *desirable specifications*;
- ▶ **Tropical regulation problem** $\mathcal{R}(A, B, E, D)$: find a control action $u[k]$ such that for *every* initial condition $x[0]$ there exists a natural number K such that $x[k] \in \mathcal{S}$ for all $k \geq K$;

(A,B) geometrical invariance and controllable coupled problems

- ▶ A subset $\mathcal{K} \subseteq \mathcal{X}$ is said to be *(A,B) geometrical invariant* if for any $x \in \mathcal{K}$ there exists $u \in \mathcal{U}$ such that $Ax \oplus Bu \in \mathcal{K}$;

/

(A,B) geometrical invariance and controllable coupled problems

- ▶ A subset $\mathcal{K} \subseteq \mathcal{X}$ is said to be *(A,B) geometrical invariant* if for any $x \in \mathcal{K}$ there exists $u \in \mathcal{U}$ such that $Ax \oplus Bu \in \mathcal{K}$;
- ▶ Given a specification semimodule \mathcal{S} of a problem $\mathcal{R}(A, B, E, D)$, there exists a maximal (A, B) geometrical invariant set inside \mathcal{S} . It will be denoted by $\mathcal{K}_{max}(\mathcal{R})$;

/

(A,B) geometrical invariance and controllable coupled problems

- ▶ A subset $\mathcal{K} \subseteq \mathcal{X}$ is said to be *(A,B) geometrical invariant* if for any $x \in \mathcal{K}$ there exists $u \in \mathcal{U}$ such that $Ax \oplus Bu \in \mathcal{K}$;
- ▶ Given a specification semimodule \mathcal{S} of a problem $\mathcal{R}(A, B, E, D)$, there exists a maximal *(A, B) geometrical invariant* set inside \mathcal{S} . It will be denoted by $\mathcal{K}_{max}(\mathcal{R})$;
- ▶ **Definition:** a problem \mathcal{R} is said to be *controllable coupled* if any member x of $\mathcal{K}_{max}(\mathcal{R})$, except the null vector \perp , is devoid of null entries \perp ;

/

(A,B) geometrical invariance and controllable coupled problems

- ▶ A subset $\mathcal{K} \subseteq \mathcal{X}$ is said to be *(A,B) geometrical invariant* if for any $x \in \mathcal{K}$ there exists $u \in \mathcal{U}$ such that $Ax \oplus Bu \in \mathcal{K}$;
- ▶ Given a specification semimodule \mathcal{S} of a problem $\mathcal{R}(A, B, E, D)$, there exists a maximal *(A, B) geometrical invariant* set inside \mathcal{S} . It will be denoted by $\mathcal{K}_{max}(\mathcal{R})$;
- ▶ **Definition:** a problem \mathcal{R} is said to be *controllable coupled* if any member x of $\mathcal{K}_{max}(\mathcal{R})$, except the null vector \perp , is devoid of null entries \perp ;
- ▶ Intuition: in controllable coupled problems, all the firing times will fire at the same average rate (eg: one firing per two minutes), although possibly with time shifts between them (eg: x_1 is delayed five minutes in comparison to x_2);

/

(A,B) geometrical invariance and controllable coupled problems

- ▶ A subset $\mathcal{K} \subseteq \mathcal{X}$ is said to be *(A,B) geometrical invariant* if for any $x \in \mathcal{K}$ there exists $u \in \mathcal{U}$ such that $Ax \oplus Bu \in \mathcal{K}$;
- ▶ Given a specification semimodule \mathcal{S} of a problem $\mathcal{R}(A, B, E, D)$, there exists a maximal *(A, B) geometrical invariant* set inside \mathcal{S} . It will be denoted by $\mathcal{K}_{max}(\mathcal{R})$;
- ▶ **Definition:** a problem \mathcal{R} is said to be *controllable coupled* if any member x of $\mathcal{K}_{max}(\mathcal{R})$, except the null vector \perp , is devoid of null entries \perp ;
- ▶ Intuition: in controllable coupled problems, all the firing times will fire at the same average rate (eg: one firing per two minutes), although possibly with time shifts between them (eg: x_1 is delayed five minutes in comparison to x_2);
- ▶ May seem restrictive, but it is not.

/

(A,B) geometrical invariance and controllable coupled problems

- ▶ Example:

(A,B) geometrical invariance and controllable coupled problems

- ▶ Example:
- ▶ Consider the problem $\mathcal{R}(A, B, E, D)$

$$\begin{pmatrix} x_1[k+1] \\ x_2[k+1] \\ x_3[k+1] \end{pmatrix} = \underbrace{\begin{pmatrix} 0 & \perp & \perp \\ \perp & 0 & \perp \\ \perp & \perp & 0 \end{pmatrix}}_A \begin{pmatrix} x_1[k] \\ x_2[k] \\ x_3[k] \end{pmatrix} \oplus \underbrace{\begin{pmatrix} 0 & \perp & \perp \\ \perp & 0 & \perp \\ \perp & \perp & 0 \end{pmatrix}}_B \begin{pmatrix} u_1[k] \\ u_2[k] \\ u_3[k] \end{pmatrix} \quad (3)$$

in which the specification is

$$\underbrace{\begin{pmatrix} 0 & \perp & \perp \end{pmatrix}}_E \begin{pmatrix} x_1[k] \\ x_2[k] \\ x_3[k] \end{pmatrix} = \underbrace{\begin{pmatrix} \perp & 0 & \perp \end{pmatrix}}_D \begin{pmatrix} x_1[k] \\ x_2[k] \\ x_3[k] \end{pmatrix}. \quad (4)$$

i.e: three completely independent machines in which it is desirable to synchronize the first with the second, but we don't care about the third one;

(A,B) geometrical invariance and controllable coupled problems

- ▶ The maximal (A,B) geometrical invariant set inside the constraints, $\mathcal{K}_{max}(\mathcal{R})$, is given by

$$\mathcal{K}_{max}(\mathcal{R}) = \text{Im} \left\{ \begin{pmatrix} 0 & \perp \\ 0 & \perp \\ \perp & 0 \end{pmatrix} \right\}. \quad (5)$$

(A,B) geometrical invariance and controllable coupled problems

- ▶ The maximal (A,B) geometrical invariant set inside the constraints, $\mathcal{K}_{max}(\mathcal{R})$, is given by

$$\mathcal{K}_{max}(\mathcal{R}) = Im \left\{ \left(\begin{array}{cc} 0 & \perp \\ 0 & \perp \\ \perp & 0 \end{array} \right) \right\}. \quad (5)$$

- ▶ Therefore, it is *not* controllable coupled;

(A,B) geometrical invariance and controllable coupled problems

- ▶ The maximal (A,B) geometrical invariant set inside the constraints, $\mathcal{K}_{max}(\mathcal{R})$, is given by

$$\mathcal{K}_{max}(\mathcal{R}) = Im \left\{ \begin{pmatrix} 0 & \perp \\ 0 & \perp \\ \perp & 0 \end{pmatrix} \right\}. \quad (5)$$

- ▶ Therefore, it is *not* controllable coupled;
- ▶ Makes sense: the first and second machines are demanded to be synchronized, and thus will have the same production rate in steady state, but the third can have a completely different rate;

(A,B) geometrical invariance and controllable coupled problems

- ▶ The maximal (A,B) geometrical invariant set inside the constraints, $\mathcal{K}_{max}(\mathcal{R})$, is given by

$$\mathcal{K}_{max}(\mathcal{R}) = \text{Im} \left\{ \begin{pmatrix} 0 & \perp \\ 0 & \perp \\ \perp & 0 \end{pmatrix} \right\}. \quad (5)$$

- ▶ Therefore, it is *not* controllable coupled;
- ▶ Makes sense: the first and second machines are demanded to be synchronized, and thus will have the same production rate in steady state, but the third can have a completely different rate;
- ▶ Do this problem makes sense as a whole?

(A,B) geometrical invariance and controllable coupled problems

- ▶ The maximal (A,B) geometrical invariant set inside the constraints, $\mathcal{K}_{max}(\mathcal{R})$, is given by

$$\mathcal{K}_{max}(\mathcal{R}) = \text{Im} \left\{ \begin{pmatrix} 0 & \perp \\ 0 & \perp \\ \perp & 0 \end{pmatrix} \right\}. \quad (5)$$

- ▶ Therefore, it is *not* controllable coupled;
- ▶ Makes sense: the first and second machines are demanded to be synchronized, and thus will have the same production rate in steady state, but the third can have a completely different rate;
- ▶ Does this problem make sense as a whole?
- ▶ Suggestion: consider the subproblem with the two machines + constraints, disregard the last machine. This subproblem *is coupled*;

(A,B) geometrical invariance and controllable coupled problems

- ▶ Checking if the problem is coupled by computing $\mathcal{K}_{max}(\mathcal{R})$ is highly onerous;

(A,B) geometrical invariance and controllable coupled problems

- ▶ Checking if the problem is coupled by computing $\mathcal{K}_{max}(\mathcal{R})$ is highly onerous;
- ▶ There are some easy-to-check *sufficient* conditions;

(A,B) geometrical invariance and controllable coupled problems

- ▶ Checking if the problem is coupled by computing $\mathcal{K}_{max}(\mathcal{R})$ is highly onerous;
- ▶ There are some easy-to-check *sufficient* conditions;
- ▶ If the constraint can be written as $x[k] \succeq Mx[k]$, which is often the case, M^* does not having \perp entries is sufficient;

Control characteristic equation

- ▶ **Definition:** the *control characteristic equation* $\mathcal{C}(\mathcal{R})$ associated to the problem $\mathcal{R}(A, B, E, D)$ is the following equation for the unknowns $\chi \in \mathcal{X}$, $\mu \in \mathcal{U}$ and $\lambda \in \mathbb{R}$

$$\begin{aligned}\lambda\chi &= A\chi \oplus B\mu; \\ E\chi &= D\chi.\end{aligned}\tag{6}$$

Furthermore, a solution $\{\lambda, \chi, \mu\}$ is *proper* if no entry of χ is the null element \perp ;

Control characteristic equation

- ▶ **Definition:** the *control characteristic equation* $\mathcal{C}(\mathcal{R})$ associated to the problem $\mathcal{R}(A, B, E, D)$ is the following equation for the unknowns $\chi \in \mathcal{X}$, $\mu \in \mathcal{U}$ and $\lambda \in \mathbb{R}$

$$\begin{aligned}\lambda\chi &= A\chi \oplus B\mu; \\ E\chi &= D\chi.\end{aligned}\tag{6}$$

Furthermore, a solution $\{\lambda, \chi, \mu\}$ is *proper* if no entry of χ is the null element \perp ;

- ▶ **Definition:** the *control characteristic spectrum* of a problem, $\Lambda(\mathcal{R})$, is the set of λ such that $\{\lambda, \chi, \mu\}$ is a proper solution;

Control characteristic equation

- ▶ **Definition:** the *control characteristic equation* $\mathcal{C}(\mathcal{R})$ associated to the problem $\mathcal{R}(A, B, E, D)$ is the following equation for the unknowns $\chi \in \mathcal{X}$, $\mu \in \mathcal{U}$ and $\lambda \in \mathbb{R}$

$$\begin{aligned}\lambda\chi &= A\chi \oplus B\mu; \\ E\chi &= D\chi.\end{aligned}\tag{6}$$

Furthermore, a solution $\{\lambda, \chi, \mu\}$ is *proper* if no entry of χ is the null element \perp ;

- ▶ **Definition:** the *control characteristic spectrum* of a problem, $\Lambda(\mathcal{R})$, is the set of λ such that $\{\lambda, \chi, \mu\}$ is a proper solution;
- ▶ $\Lambda(\mathcal{R})$ is a subset of the real line and contains the set of all the rates that are allowable to have for the system under control regime;

Controllable non-critical problems

- ▶ All the members of $\Lambda(\mathcal{R})$ are greater than the uncontrolled ($u[k] = \perp$) system spectral radius, $\rho(A)$: it is not possible to increase the system rate;

Controllable non-critical problems

- ▶ All the members of $\Lambda(\mathcal{R})$ are greater than the uncontrolled ($u[k] = \perp$) system spectral radius, $\rho(A)$: it is not possible to increase the system rate;
- ▶ **Definition:** a problem \mathcal{R} is said to be *controllable critical* if the control characteristic spectrum $\Lambda(\mathcal{R})$ is the singleton $\{\rho(A)\}$. Otherwise, it is said to be *controllable non-critical*;

Controllable non-critical problems

- ▶ All the members of $\Lambda(\mathcal{R})$ are greater than the uncontrolled ($u[k] = \perp$) system spectral radius, $\rho(A)$: it is not possible to increase the system rate;
- ▶ **Definition:** a problem \mathcal{R} is said to be *controllable critical* if the control characteristic spectrum $\Lambda(\mathcal{R})$ is the singleton $\{\rho(A)\}$. Otherwise, it is said to be *controllable non-critical*;
- ▶ Intuition: controllable non-critical means that there is a solution for the problem that delays the system, even if just a little bit;

Controllable non-critical problems

- ▶ All the members of $\Lambda(\mathcal{R})$ are greater than the uncontrolled ($u[k] = \perp$) system spectral radius, $\rho(A)$: it is not possible to increase the system rate;
- ▶ **Definition:** a problem \mathcal{R} is said to be *controllable critical* if the control characteristic spectrum $\Lambda(\mathcal{R})$ is the singleton $\{\rho(A)\}$. Otherwise, it is said to be *controllable non-critical*;
- ▶ Intuition: controllable non-critical means that there is a solution for the problem that delays the system, even if just a little bit;
- ▶ It is more restrictive than being *controllable coupled*, but *all* problems found in literature thus far are both *controllable coupled* and *controllable non-critical*;

Convergence number

- ▶ **Definition:** Given a square matrix M with $\rho(M) \leq 0$, the *convergence number* $\kappa(M)$ is the smallest number k such that

$$M^* = I \oplus M \oplus M^2 \oplus M^3 \oplus \dots \oplus M^k. \quad (7)$$

Convergence number

- ▶ **Definition:** Given a square matrix M with $\rho(M) \leq 0$, the *convergence number* $\kappa(M)$ is the smallest number k such that

$$M^* = I \oplus M \oplus M^2 \oplus M^3 \oplus \dots \oplus M^k. \quad (7)$$

- ▶ If M has n rows (and hence n columns), then $\kappa(M) \leq n$.

Main results

- ▶ **Theorem 1:** a controllable coupled problem \mathcal{R} is solvable *only if* the control characteristic equation $\mathcal{C}(\mathcal{R})$ has a proper solution $\{\lambda, \chi, \mu\}$;

Main results

- ▶ **Theorem 1:** a controllable coupled problem \mathcal{R} is solvable *only if* the control characteristic equation $\mathcal{C}(\mathcal{R})$ has a proper solution $\{\lambda, \chi, \mu\}$;
- ▶ **Theorem 2:** a controllable coupled and controllable non-critical problem \mathcal{R} is solvable *if and only if* its control characteristic equation $\mathcal{C}(\mathcal{R})$ has a proper solution $\{\lambda, \chi, \mu\}$. The control action is a simple state feedback of the form

$$u[k] = Fx[k] \tag{8}$$

in which $F = \mu(-\chi)^T$. Furthermore, the closed loop system will have eigenvalue equal to λ and convergence to \mathcal{S} is achieved in at most $\kappa(\lambda^{-1}A)$ events.

Solving the control characteristic equation

- ▶ The control characteristic equation $\mathcal{C}(\mathcal{R})$ can be written conveniently as

$$\begin{pmatrix} A & B \\ EA & EB \end{pmatrix} \begin{pmatrix} \chi \\ \mu \end{pmatrix} = \lambda \begin{pmatrix} I & \perp \\ D & \perp \end{pmatrix} \begin{pmatrix} \chi \\ \mu \end{pmatrix}; \quad (9)$$

Solving the control characteristic equation

- ▶ The control characteristic equation $\mathcal{C}(\mathcal{R})$ can be written conveniently as

$$\begin{pmatrix} A & B \\ EA & EB \end{pmatrix} \begin{pmatrix} \chi \\ \mu \end{pmatrix} = \lambda \begin{pmatrix} I & \perp \\ D & \perp \end{pmatrix} \begin{pmatrix} \chi \\ \mu \end{pmatrix}; \quad (9)$$

- ▶ This can be written as $Uy = \lambda Vy$, for unknowns $\{\lambda, y\}$. This is a *tropical two-sided eigenproblem*;

Solving the control characteristic equation

- ▶ The control characteristic equation $\mathcal{C}(\mathcal{R})$ can be written conveniently as

$$\begin{pmatrix} A & B \\ EA & EB \end{pmatrix} \begin{pmatrix} \chi \\ \mu \end{pmatrix} = \lambda \begin{pmatrix} I & \perp \\ D & \perp \end{pmatrix} \begin{pmatrix} \chi \\ \mu \end{pmatrix}; \quad (9)$$

- ▶ This can be written as $Uy = \lambda Vy$, for unknowns $\{\lambda, y\}$. This is a *tropical two-sided eigenproblem*;
- ▶ Can be seen as a *parametric mean-payoff game*, see [4];

Solving the control characteristic equation

- ▶ The control characteristic equation $\mathcal{C}(\mathcal{R})$ can be written conveniently as

$$\begin{pmatrix} A & B \\ EA & EB \end{pmatrix} \begin{pmatrix} \chi \\ \mu \end{pmatrix} = \lambda \begin{pmatrix} I & \perp \\ D & \perp \end{pmatrix} \begin{pmatrix} \chi \\ \mu \end{pmatrix}; \quad (9)$$

- ▶ This can be written as $Uy = \lambda Vy$, for unknowns $\{\lambda, y\}$. This is a *tropical two-sided eigenproblem*;
- ▶ Can be seen as a *parametric mean-payoff game*, see [4];
- ▶ Techniques for solving it studied only very recently, see [1, 3, 2, 4];

Solving the control characteristic equation

- ▶ The control characteristic equation $\mathcal{C}(\mathcal{R})$ can be written conveniently as

$$\begin{pmatrix} A & B \\ EA & EB \end{pmatrix} \begin{pmatrix} \chi \\ \mu \end{pmatrix} = \lambda \begin{pmatrix} I & \perp \\ D & \perp \end{pmatrix} \begin{pmatrix} \chi \\ \mu \end{pmatrix}; \quad (9)$$

- ▶ This can be written as $Uy = \lambda Vy$, for unknowns $\{\lambda, y\}$. This is a *tropical two-sided eigenproblem*;
- ▶ Can be seen as a *parametric mean-payoff game*, see [4];
- ▶ Techniques for solving it studied only very recently, see [1, 3, 2, 4];
- ▶ *Pseudopolynomial algorithms*: not very difficult to solve currently for medium-sized systems (< 100 unknowns);

Solving the control characteristic equation

- ▶ The control characteristic equation $\mathcal{C}(\mathcal{R})$ can be written conveniently as

$$\begin{pmatrix} A & B \\ EA & EB \end{pmatrix} \begin{pmatrix} \chi \\ \mu \end{pmatrix} = \lambda \begin{pmatrix} I & \perp \\ D & \perp \end{pmatrix} \begin{pmatrix} \chi \\ \mu \end{pmatrix}; \quad (9)$$

- ▶ This can be written as $Uy = \lambda Vy$, for unknowns $\{\lambda, y\}$. This is a *tropical two-sided eigenproblem*;
- ▶ Can be seen as a *parametric mean-payoff game*, see [4];
- ▶ Techniques for solving it studied only very recently, see [1, 3, 2, 4];
- ▶ *Pseudopolynomial algorithms*: not very difficult to solve currently for medium-sized systems (< 100 unknowns);
- ▶ Another technique to solve it efficiently for large systems (near to a thousand of unknowns) is under development by the author and his collaborators.

Solving the control characteristic equation

- ▶ The technique in [4] is based in the construction of the *spectral function* $s(\lambda)$ associated to the two-sided equation;

Solving the control characteristic equation

- ▶ The technique in [4] is based in the construction of the *spectral function* $s(\lambda)$ associated to the two-sided equation;
- ▶ Piecewise affine, Lipschitz continuous and nonpositive function;

Solving the control characteristic equation

- ▶ The technique in [4] is based in the construction of the *spectral function* $s(\lambda)$ associated to the two-sided equation;
- ▶ Piecewise affine, Lipschitz continuous and nonpositive function;
- ▶ The set of λ such that $\{\lambda, y\}$ is a solution for a $y = \perp$, is the set of λ such that $s(\lambda) = 0$;


Solving the control characteristic equation

- ▶ The technique in [4] is based in the construction of the *spectral function* $s(\lambda)$ associated to the two-sided equation;
- ▶ Piecewise affine, Lipschitz continuous and nonpositive function;
- ▶ The set of λ such that $\{\lambda, y\}$ is a solution for a $y = \perp$, is the set of λ such that $s(\lambda) = 0$;
- ▶ In the context of the control characteristic equation $\mathcal{C}(\mathcal{R})$, $y = (\chi^T \mu^T)^T$, but $y \neq \perp$ does not guarantee, in principle, that χ has not \perp entries. That is, it does not guarantee that the solution generated from y will be proper to $\mathcal{C}(\mathcal{R})$;

Solving the control characteristic equation


- ▶ The technique in [4] is based in the construction of the *spectral function* $s(\lambda)$ associated to the two-sided equation;
- ▶ Piecewise affine, Lipschitz continuous and nonpositive function;
- ▶ The set of λ such that $\{\lambda, y\}$ is a solution for a $y = \perp$, is the set of λ such that $s(\lambda) = 0$;
- ▶ In the context of the control characteristic equation $\mathcal{C}(\mathcal{R})$, $y = (\chi^T \mu^T)^T$, but $y \neq \perp$ does not guarantee, in principle, that χ has not \perp entries. That is, it does not guarantee that the solution generated from y will be proper to $\mathcal{C}(\mathcal{R})$;
- ▶ If the problem is controllable coupled, however, any solution to the two-sided eigenproblem generates a proper solution to the control characteristic equation $\mathcal{C}(\mathcal{R})$, that is, $y \neq \perp$ implies that χ does not have \perp entries;

Solving the control characteristic equation

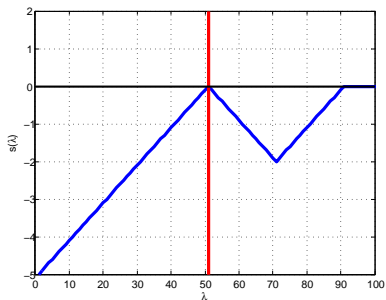


- ▶ Algorithms for finding the zeroes of $s(\lambda)$ require evaluations of this function, see [4];

Solving the control characteristic equation

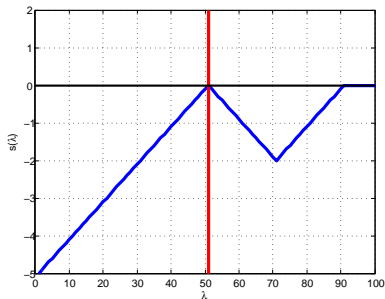

- ▶ Algorithms for finding the zeroes of $s(\lambda)$ require evaluations of this function, see [4];
- ▶ This can be done by *solving* the associated mean-payoff game at the point λ ;


Solving the control characteristic equation

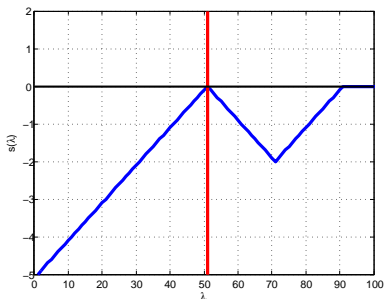

- ▶ Algorithms for finding the zeroes of $s(\lambda)$ require evaluations of this function, see [4];
- ▶ This can be done by *solving* the associated mean-payoff game at the point λ ;
- ▶ In the given example, $\rho(A) = 50$ (red line). The control characteristic spectra is $\Lambda = \{50\} \cup [90, 100]$, which is not the singleton $\{\rho(A)\} = \{50\}$, so the problem is controllable non-critical;


Example of problem

- Problem of controlling a cluster tool in a wafer manufacturing process;




Example of problem

- ▶ Problem of controlling a cluster tool in a wafer manufacturing process;
- ▶ 4 states, 2 control inputs;



Example of problem

- ▶ Problem of controlling a cluster tool in a wafer manufacturing process;
- ▶ 4 states, 2 control inputs;
- ▶ Equation



$$x[k + 1] = Ax[k] \oplus Bu[k];$$

$$A = \begin{pmatrix} \perp & \perp & 6 & 1 \\ \perp & \perp & 8 & 4 \\ \perp & \perp & 9 & 5 \\ \perp & \perp & 11 & 7 \end{pmatrix};$$

$$B = \begin{pmatrix} 0 & \perp \\ 2 & \perp \\ 3 & \perp \\ 5 & 0 \end{pmatrix}.$$


(10)

Example of problem

► Constraints:

$$x_1[k] - x_2[k - 1] \leq 10;$$

$$|x_i[k] - x_j[k]| \leq 30, i, j = \{1, 2, 3, 4\}$$




Example of problem

- Constraints:

$$x_1[k] - x_2[k - 1] \leq 10;$$

$$|x_i[k] - x_j[k]| \leq 30, i, j = \{1, 2, 3, 4\}$$




- First constraint ensures that a piece cannot stay processing for more than 10 units, lest the piece degrades its quality;

Example of problem

- Constraints:

$$x_1[k] - x_2[k - 1] \leq 10;$$

$$|x_i[k] - x_j[k]| \leq 30, i, j = \{1, 2, 3, 4\}$$




- First constraint ensures that a piece cannot stay processing for more than 10 units, lest the piece degrades its quality;

Example of problem

- Constraints:


$$x_1[k] - x_2[k - 1] \leq 10;$$

$$|x_i[k] - x_j[k]| \leq 30, i, j = \{1, 2, 3, 4\}$$



- First constraint ensures that a piece cannot stay processing for more than 10 units, lest the piece degrades its quality;
- First constraint cannot be written as $E x[k] = D x[k]$ due to the fact that there is no state $x_2[k - 1]$!

Example of problem



► Constraints:

$$x_1[k] - x_2[k - 1] \leq 10;$$

$$|x_i[k] - x_j[k]| \leq 30, i, j = \{1, 2, 3, 4\}$$


- First constraint ensures that a piece cannot stay processing for more than 10 units, lest the piece degrades its quality;
- First constraint cannot be written as $E_x[k] = D_x[k]$ due to the fact that there is no state $x_2[k - 1]$!;
- Easy: create a new state $x_5[k]$ and put as equation $x_5[k + 1] = x_2[k]$;

Example of problem

- ▶ Constraints:

$$x_1[k] - x_2[k - 1] \leq 10;$$

$$|x_i[k] - x_j[k]| \leq 30, i, j = \{1, 2, 3, 4\}$$




- ▶ First constraint ensures that a piece cannot stay processing for more than 10 units, lest the piece degrades its quality;
- ▶ First constraint cannot be written as $E_x[k] = D_x[k]$ due to the fact that there is no state $x_2[k - 1]$!;
- ▶ Easy: create a new state $x_5[k]$ and put as equation $x_5[k + 1] = x_2[k]$;
- ▶ Augmented system has now 5 states, 4 originals + the artificial one;

Example of problem

- Constraints:

$$x_1[k] - x_2[k - 1] \leq 10;$$

$$|x_i[k] - x_j[k]| \leq 30, i, j = \{1, 2, 3, 4\}$$

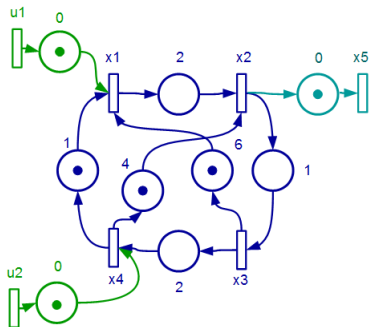

- First constraint ensures that a piece cannot stay processing for more than 10 units, lest the piece degrades its quality;
- First constraint cannot be written as $E_x[k] = D_x[k]$ due to the fact that there is no state $x_2[k - 1]$!;
- Easy: create a new state $x_5[k]$ and put as equation $x_5[k + 1] = x_2[k]$;
- Augmented system has now 5 states, 4 originals + the artificial one;

Example of problem

- ▶ Now we have the system $\hat{x}[k+1] = \hat{A}\hat{x}[k] \oplus \hat{B}\hat{u}[k]$ (augmented) and the constraint $E\hat{x}[k] = D\hat{x}[k]$;

Example of problem

- ▶ Now we have the system $\hat{x}[k+1] = \hat{A}\hat{x}[k] \oplus \hat{B}\hat{u}[k]$ (augmented) and the constraint $E\hat{x}[k] = D\hat{x}[k]$;
- ▶ In special, the constraints can be written as $\hat{x}[k] = M^*\hat{x}[k]$ ($E = I$ and $D = M$);

Example of problem

- ▶ Now we have the system $\hat{x}[k+1] = \hat{A}\hat{x}[k] \oplus \hat{B}\hat{u}[k]$ (augmented) and the constraint $E\hat{x}[k] = D\hat{x}[k]$;
- ▶ In special, the constraints can be written as $\hat{x}[k] = M^*\hat{x}[k]$ ($E = I$ and $D = M$);
- ▶ M^* has no \perp entries: problem is *controllable coupled*;

Example of problem

- ▶ Now we have the system $\hat{x}[k+1] = \hat{A}\hat{x}[k] \oplus \hat{B}\hat{u}[k]$ (augmented) and the constraint $E\hat{x}[k] = D\hat{x}[k]$;
- ▶ In special, the constraints can be written as $\hat{x}[k] = M^*\hat{x}[k]$ ($E = I$ and $D = M$);
- ▶ M^* has no \perp entries: problem is *controllable coupled*;
- ▶ Now, write down and solve the associated control characteristic equation

$$\lambda\chi = \hat{A}\chi \oplus \hat{B}\mu;$$


$$E\chi = D\chi;$$

Solving the control characteristic equation

- ▶ For that, transform it in a two-sided eigenproblem;


Solving the control characteristic equation

- ▶ For that, transform it in a two-sided eigenproblem;
- ▶ Use an algorithm (ex: [4]) to find the spectral function $s(\lambda)$;

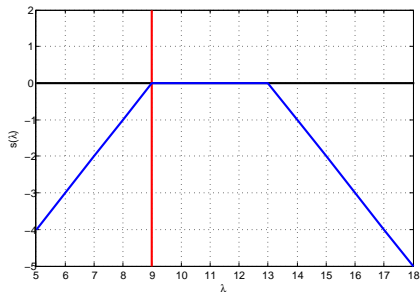

Solving the control characteristic equation


- ▶ For that, transform it in a two-sided eigenproblem;
- ▶ Use an algorithm (ex: [4]) to find the spectral function $s(\lambda)$;

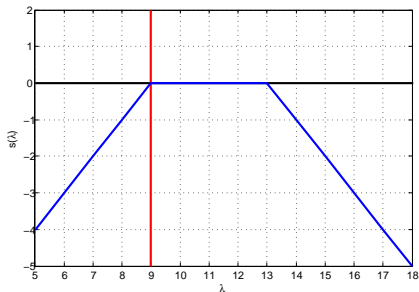

- ▶ Figure above shows that $\Lambda = [9, 13]$. There is an element other than $\rho(\hat{A}) = 9$, so the problem is *controllable non-critical*;

Solving the control characteristic equation

- ▶ For that, transform it in a two-sided eigenproblem;
- ▶ Use an algorithm (ex: [4]) to find the spectral function $s(\lambda)$;

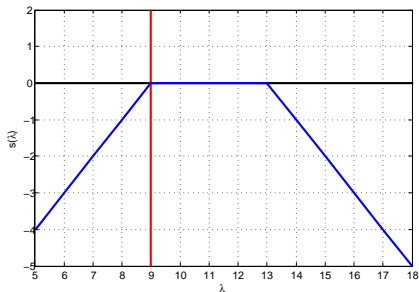

- ▶ Figure above shows that $\Lambda = [9, 13]$. There is an element other than $\rho(\hat{A}) = 9$, so the problem is *controllable non-critical*;
- ▶ The control characteristic equation then provides a necessary and sufficient condition for solving the problem;

Example of problem

- ▶ Take $\lambda = 10$;

Example of problem

- ▶ Take $\lambda = 10$;
- ▶ With this, it is possible to find the following proper solution

$$\mu = \begin{pmatrix} 0 \\ 0 \end{pmatrix} ; \chi = \begin{pmatrix} -10 \\ -8 \\ -7 \\ -5 \\ -18 \end{pmatrix}. \quad (11)$$

Example of problem

- ▶ Take $\lambda = 10$;
- ▶ With this, it is possible to find the following proper solution

$$\mu = \begin{pmatrix} 0 \\ 0 \end{pmatrix} ; \chi = \begin{pmatrix} -10 \\ -8 \\ -7 \\ -5 \\ -18 \end{pmatrix}. \quad (11)$$

- ▶ Since $(\lambda^{-1}A)^* = I \oplus (\lambda^{-1}A) \oplus (\lambda^{-1}A)^2$, one concludes that $\kappa(\lambda^{-1}A) = 2$;

Example of problem

- ▶ Take $\lambda = 10$;
- ▶ With this, it is possible to find the following proper solution

$$\mu = \begin{pmatrix} 0 \\ 0 \end{pmatrix} ; \chi = \begin{pmatrix} -10 \\ -8 \\ -7 \\ -5 \\ -18 \end{pmatrix}. \quad (11)$$

- ▶ Since $(\lambda^{-1}A)^* = I \oplus (\lambda^{-1}A) \oplus (\lambda^{-1}A)^2$, one concludes that $\kappa(\lambda^{-1}A) = 2$;
- ▶ This means that the controller that will be derived will induce a periodic regime in which each event will fire at every $\lambda = 10$ time units. Furthermore, it will take at most $\kappa(\lambda^{-1}A) = 2$ events before this regime is achieved, whichever it is the initial condition;

Example of problem

► Now

$$F = \mu\zeta^T = \mu(-\chi)^T = \begin{pmatrix} 0 \\ 0 \end{pmatrix} (10 \ 8 \ 7 \ 5 \ 18) \quad (12)$$

and $u[k] = Fx[k]$ solves the proposed problem;

Example of problem

- ▶ Now


$$F = \mu\zeta^T = \mu(-\chi)^T = \begin{pmatrix} 0 \\ 0 \end{pmatrix} (10 \quad 8 \quad 7 \quad 5 \quad 18) \quad (12)$$

and $u[k] = Fx[k]$ solves the proposed problem;

- ▶ The factorization $F = \mu\zeta^T$ implies an interesting and simple control topology;

Example of problem

$$x_1[k] - x_2[k-1] \leq 10$$

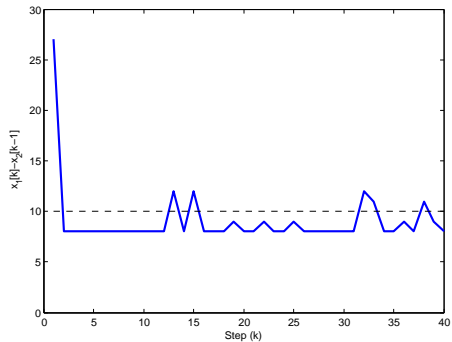

Practical concerns

- ▶ The feedback matrix F may be non-causal: may demand "future prediction";

Practical concerns

- ▶ The feedback matrix F may be non-causal: may demand "future prediction";
- ▶ Causalisation techniques will be discussed in another occasion;

Practical concerns

- ▶ The feedback matrix F may be non-causal: may demand "future prediction";
- ▶ Causalisation techniques will be discussed in another occasion;
- ▶ Basically, causalisation can be achieved by losing speed of convergence (number of events taken to convergence);

Practical concerns

- ▶ The feedback matrix F may be non-causal: may demand "future prediction";
- ▶ Causalisation techniques will be discussed in another occasion;
- ▶ Basically, causalisation can be achieved by losing speed of convergence (number of events taken to convergence);
- ▶ Losing speed of convergence is losing robustness to perturbations;

Practical concerns

- ▶ The feedback matrix F may be non-causal: may demand "future prediction";
- ▶ Causalisation techniques will be discussed in another occasion;
- ▶ Basically, causalisation can be achieved by losing speed of convergence (number of events taken to convergence);
- ▶ Losing speed of convergence is losing robustness to perturbations;
- ▶ On the other hand, speed of convergence can also be improved;

Practical concerns

- ▶ The feedback matrix F may be non-causal: may demand "future prediction";
- ▶ Causalisation techniques will be discussed in another occasion;
- ▶ Basically, causalisation can be achieved by losing speed of convergence (number of events taken to convergence);
- ▶ Losing speed of convergence is losing robustness to perturbations;
- ▶ On the other hand, speed of convergence can also be improved;
- ▶ This also will be discussed in another occasion;

The dual theory for observers

- ▶ (Almost) dual theory for observers can be developed;

The dual theory for observers

- ▶ (Almost) dual theory for observers can be developed;
- ▶ Relies in dualities between semimodules and congruences;

The dual theory for observers

- ▶ (Almost) dual theory for observers can be developed;
- ▶ Relies in dualities between semimodules and congruences;
- ▶ Dual concepts: *observable coupled*, *observation characteristic equation*, *observable critical*, etc...

The dual theory for observers

- ▶ (Almost) dual theory for observers can be developed;
- ▶ Relies in dualities between semimodules and congruences;
- ▶ Dual concepts: *observable coupled*, *observation characteristic equation*, *observable critical*, etc...
- ▶ For instance, compare:
 - Controllable non-critical*: the *controller* can have a *slower* behavior than the system behavior;
 - Observable non-critical*: the *observer* can have a *faster* behavior than the system behavior;

The dual theory for observers

- ▶ (Almost) dual theory for observers can be developed;
- ▶ Relies in dualities between semimodules and congruences;
- ▶ Dual concepts: *observable coupled*, *observation characteristic equation*, *observable critical*, etc...
- ▶ For instance, compare:
 - Controllable non-critical*: the *controller* can have a *slower* behavior than the system behavior;
 - Observable non-critical*: the *observer* can have a *faster* behavior than the system behavior;
- ▶ Interesting fact: in traditional linear system theory, observability conditions do not depend on the matrix B (that connects inputs to states). Due to the absence of subtraction, in the tropical setting *observability do depend on the input matrix B !*

To do 1: critical problems

- ▶ We have a necessary condition for *all* problems: the control characteristic equation;

To do 1: critical problems

- ▶ We have a necessary condition for *all* problems: the control characteristic equation;
- ▶ It is sufficient only for *controllable non-critical problems*;

To do 1: critical problems

- ▶ We have a necessary condition for *all* problems: the control characteristic equation;
- ▶ It is sufficient only for *controllable non-critical problems*;
- ▶ To do: derive a sufficient condition for *controllable critical problems*;

To do 1: critical problems

- ▶ We have a necessary condition for *all* problems: the control characteristic equation;
- ▶ It is sufficient only for *controllable non-critical problems*;
- ▶ To do: derive a sufficient condition for *controllable critical problems*;
- ▶ If this is done, the problem is complete: one has a necessary and sufficient condition for all problems;

To do 1: critical problems

- ▶ Guess: the solution to the problem lies in the *generalized control characteristic equation*, $\mathcal{C}_K(\mathcal{R})$;

To do 1: critical problems

- ▶ Guess: the solution to the problem lies in the *generalized control characteristic equation*, $\mathcal{C}_K(\mathcal{R})$;
- ▶ For $K = 1$, $\mathcal{C}_1(\mathcal{R}) = \mathcal{C}(\mathcal{R})$, for $K = 2$:

$$\chi_2 = A\chi_1 \oplus B\mu_1;$$

$$\lambda\chi_1 = A\chi_2 \oplus B\mu_2;$$

$$E\chi_1 = D\chi_1;$$

$$E\chi_2 = D\chi_2;$$

(13)

for the unknowns $\{\chi_1, \chi_2, \mu_1, \mu_2, \lambda\}$;

To do 1: critical problems

- ▶ Guess: the solution to the problem lies in the *generalized control characteristic equation*, $\mathcal{C}_K(\mathcal{R})$;
- ▶ For $K = 1$, $\mathcal{C}_1(\mathcal{R}) = \mathcal{C}(\mathcal{R})$, for $K = 2$:

$$\chi_2 = A\chi_1 \oplus B\mu_1;$$

$$\lambda\chi_1 = A\chi_2 \oplus B\mu_2;$$

$$E\chi_1 = D\chi_1;$$

$$E\chi_2 = D\chi_2;$$

(13)

for the unknowns $\{\chi_1, \chi_2, \mu_1, \mu_2, \lambda\}$;

- ▶ **Conjecture:** the regulation problem $\mathcal{R}(A, B, E, D)$ has a solution if and only if there exists a K such that $\mathcal{C}_K(\mathcal{R})$ has a proper solution;

To do 1: critical problems

- ▶ I am almost sure of this conjecture, but it only allows a solution in open loop;

To do 1: critical problems

- ▶ I am almost sure of this conjecture, but it only allows a solution in open loop;
- ▶ Regarding closed loops, I can show that some critical problems are solvable but the solution in closed loop *cannot* be of the form $u[k] = Fx[k]$ (static feedback);

To do 1: critical problems

- ▶ I am almost sure of this conjecture, but it only allows a solution in open loop;
- ▶ Regarding closed loops, I can show that some critical problems are solvable but the solution in closed loop *cannot* be of the form $u[k] = Fx[k]$ (static feedback);
- ▶ This implies that critical problems demand control topologies which are more complex, maybe $u[k + 1] = Gu[k] \oplus Fx[k]$;

To do 2: topical system

- ▶ A function $f(x)$ is said to be *topical* if it is non-decreasing and, for a scalar λ , $f(\lambda x) = \lambda f(x)$;

To do 2: topical system

- ▶ A function $f(x)$ is said to be *topical* if it is non-decreasing and, for a scalar λ , $f(\lambda x) = \lambda f(x)$;
- ▶ A *topical system* is, therefore

$$x[k + 1] = g(x[k], u[k]) \quad (14)$$

in which g is topical in $x[k]$ and $u[k]$;

To do 2: topical system

- ▶ A function $f(x)$ is said to be *topical* if it is non-decreasing and, for a scalar λ , $f(\lambda x) = \lambda f(x)$;
- ▶ A *topical system* is, therefore

$$x[k + 1] = g(x[k], u[k]) \quad (14)$$

in which g is topical in $x[k]$ and $u[k]$;

- ▶ Let $L(x)$ and $R(x)$ be topical functions;

To do 2: topical system

- ▶ A function $f(x)$ is said to be *topical* if it is non-decreasing and, for a scalar λ , $f(\lambda x) = \lambda f(x)$;
- ▶ A *topical system* is, therefore

$$x[k + 1] = g(x[k], u[k]) \quad (14)$$

in which g is topical in $x[k]$ and $u[k]$;

- ▶ Let $L(x)$ and $R(x)$ be topical functions;
- ▶ **Generalized regulation problem:** derive the control law $u[k]$ such that the trajectory $x[k]$ of a topical system converges and stays to the set described by $\{x \mid L(x) = R(x)\}$;

To do 2: topical system

- ▶ *Generalization* of the regulation problem proposed before;

To do 2: topical system

- ▶ *Generalization* of the regulation problem proposed before;
- ▶ Very general;

To do 2: topical system

- ▶ *Generalization* of the regulation problem proposed before;
- ▶ Very general;
- ▶ One can generalize the control characteristic control equation to topical systems

$$\begin{aligned}\lambda\chi &= g(\chi, \mu); \\ L(\chi) &= R(\chi)\end{aligned}\tag{15}$$

for the unknowns $\{\lambda, \chi, \mu\}$;

To do 2: topical system

- ▶ *Generalization* of the regulation problem proposed before;
- ▶ Very general;
- ▶ One can generalize the control characteristic control equation to topical systems

$$\begin{aligned}\lambda\chi &= g(\chi, \mu); \\ L(\chi) &= R(\chi)\end{aligned}\tag{15}$$

for the unknowns $\{\lambda, \chi, \mu\}$;

- ▶ Solving it gives an open loop controller that solves the problem;

To do 2: topical system

- ▶ *Generalization* of the regulation problem proposed before;
- ▶ Very general;
- ▶ One can generalize the control characteristic control equation to topical systems

$$\begin{aligned}\lambda\chi &= g(\chi, \mu); \\ L(\chi) &= R(\chi)\end{aligned}\tag{15}$$

for the unknowns $\{\lambda, \chi, \mu\}$;

- ▶ Solving it gives an open loop controller that solves the problem;
- ▶ *Problem*: how to solve this equation?

To do 2: topical system

- ▶ *Generalization* of the regulation problem proposed before;
- ▶ Very general;
- ▶ One can generalize the control characteristic control equation to topical systems

$$\begin{aligned}\lambda\chi &= g(\chi, \mu); \\ L(\chi) &= R(\chi)\end{aligned}\tag{15}$$

for the unknowns $\{\lambda, \chi, \mu\}$;

- ▶ Solving it gives an open loop controller that solves the problem;
- ▶ *Problem*: how to solve this equation?
- ▶ Unfortunately, particular cases of it were proven to be *NP-hard*;

Conclusions

- ▶ Concepts as *controllable coupled, controllable critical, control characteristic equation and control characteristic spectrum* have been proposed;

Conclusions

- ▶ Concepts as *controllable coupled, controllable critical, control characteristic equation and control characteristic spectrum* have been proposed;
- ▶ With the aid of them, *sufficient and necessary conditions* to a wide class of problems have been derived;

Conclusions

- ▶ Concepts as *controllable coupled, controllable critical, control characteristic equation and control characteristic spectrum* have been proposed;
- ▶ With the aid of them, *sufficient and necessary conditions* to a wide class of problems have been derived;
- ▶ Solutions can be computed *efficiently* by pseudopolynomial algorithms;

Conclusions

- ▶ Concepts as *controllable coupled, controllable critical, control characteristic equation and control characteristic spectrum* have been proposed;
- ▶ With the aid of them, *sufficient and necessary conditions* to a wide class of problems have been derived;
- ▶ Solutions can be computed *efficiently* by pseudopolynomial algorithms;
- ▶ It was implemented in a *real plant*, showing the characteristics expected by theory (as robustness to perturbations), see [5];

Conclusions

- ▶ Concepts as *controllable coupled*, *controllable critical*, *control characteristic equation and control characteristic spectrum* have been proposed;
- ▶ With the aid of them, *sufficient and necessary conditions* to a wide class of problems have been derived;
- ▶ Solutions can be computed *efficiently* by pseudopolynomial algorithms;
- ▶ It was implemented in a *real plant*, showing the characteristics expected by theory (as robustness to perturbations), see [5];
- ▶ More results/details in V. M. Gonçalves's thesis [5].

References



P.A. Binding and H. Volkmer.

A generalized eigenvalue problem in the max algebra.

Linear Algebra and its Applications, page 360371, 2007.



P. Butkovic.

Max-linear systems: theory and algorithms.

Springer, 2010.



R. A. Cuninghame-Green and P. Butkovic.

Generalised eigenproblem in max algebra.

Proceedings of the 9th International Workshop WODES, page 236241, 2008.



S. Gaubert and S. Sergeev.

The level set method for the two-sided eigenproblem.

Discrete Event Dynamic Systems, 23(2):105–134, 2013.



Vinicius Mariano Gonçalves.

Tropical Algorithms for Linear Algebra and Linear Event-invariant Dynamical Systems.

PhD thesis, Escola de Engenharia da Universidade Federal de Minas Gerais, 2014.



C. Kim and T.-E. Lee.

Feedback control of cluster tools for regulating wafer delays.

Automation Science and Engineering, IEEE Transactions on, (99):1–11, 2015.